


TITAN SS BLOCK INJECTOR



- 303 Stainless Steel Machined Metering Injection Control Block.
- ASCO Explosion proof Class 1, Div. 1, Gp. A,B,C,&D, solenoid 120 VAC / 230 VAC machined into block with Chemraz seat. Other voltage available for solenoid.
- Hall-Effect 3 wire sensor 5-30 VDC are approved for hazardous area locations.
- Sensor outputs open collector high speed pulses, unsourced.
- Stainless Steel gear set rated up to 400 psig.
- Stainless Steel gear housing plate with easy access to gear set.
- Flow range from .07 to 3.0 GPM. with nominal 5200 PPG
- Strainer body machined into block.
- Strainer has 80 mesh screen with easy removal and cleaning.
- Check valve machined into block and oriented for positive shut off.
- Designed for use with PLC's, Electronic presets, TAS systems or smart injectors.
- 3/8" MNPT Inlet and Outlet needle valves for isolation.
- Available unmounted or multiple mounting configurations pre-wired and pre-mounted
- *OPTIONAL ACCESSORIES*
- Calibration Kit- Matching quick release with 50psi check and SS tubing
- Thermal Relief Kit

PROPAC3 SMART INJECTOR WITH SS BLOCK

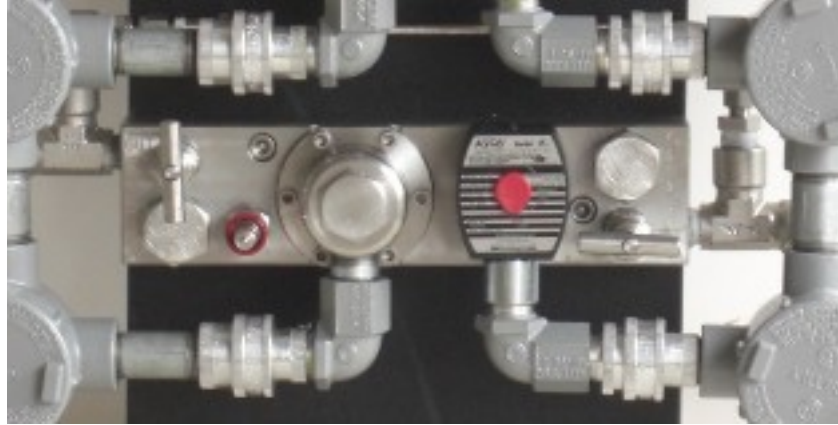

ON/OFF SWITCH

SOLENOID

STRAINER

INLET NEEDLE VALVE

THERMAL RELIEF

TEST BUTTON

FLOWMETER

OUTLET NEEDLE VALVE

CHECK VALVE

CALIBRATION

